

## Overview

The rechargeable batteries are lead-lead dioxide systems. The dilute sulfuric acid electrolyte is absorbed by separators and plates and thus immobilized. Should the battery be accidentally overcharged producing hydrogen and oxygen, special oneway valves allow the gases to escape thus avoiding excessive pressure build-up. Otherwise, the battery is completely sealed and is, therefore, maintenance-free, leak proof and usable in any position.



## Battery Construction

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper	Fiberglass	Sulfuric acid


## General Features

- Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.
- Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- UL-recognized component.
- Can be mounted in any orientation.
- Computer designed lead, calcium tin alloy grid for high power density.
- Long service life, float or cyclic applications.
- Maintenance-free operation.
- Low self discharge.
- Case and cover available in both standard and flame retardant ABS.

## Dimensions and Weight

Length(mm / inch)	70 / 2.76
Width(mm / inch)	47 / 1.85
Height(mm / inch)	98 / 3.86
Total Height(mm / inch)	104 / 4.09
Approx. Weight(Kg / lbs)	0.66 / 1.45

\* Weight deviation:  $\pm 5\%$

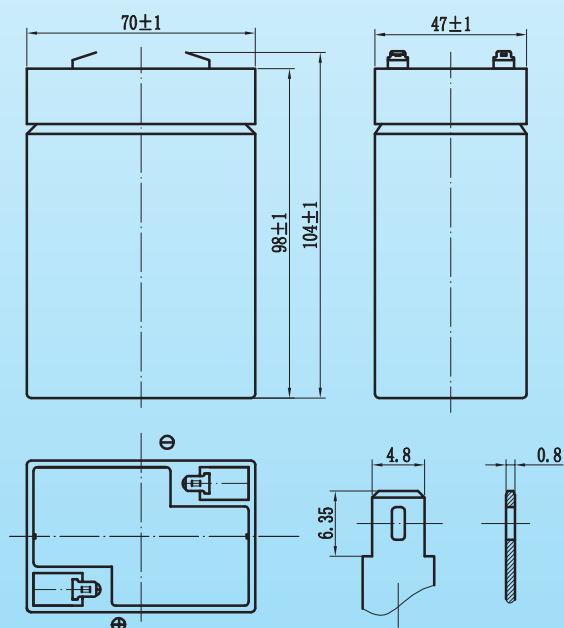

## Battery Specification

### Performance Characteristics

<b>Nominal Voltage</b>	6V
<b>Number of cell</b>	3
<b>Design Life</b>	5 years
<b>Nominal Capacity 77°F(25°C)</b>	
20 hour rate (0.20A, 5.25V)	4.0Ah
10 hour rate (0.38A, 5.25V)	3.8Ah
5 hour rate (0.69A, 5.25V)	2.45Ah
1 hour rate (2.74A, 4.8V)	2.74Ah
<b>Internal Resistance</b>	
Fully Charged battery 77°F(25°C)	30mOhms
<b>Self-Discharge</b>	
3% of capacity declined per month at 20°C(average)	
<b>Operating Temperature Range</b>	
Discharge	-20~60°C
Charge	-10~60°C
Storage	-20~60°C
<b>Max. Discharge Current 77°F(25°C)</b>	60A(5s)
<b>Short Circuit Current</b>	200A

### Discharge Constant Current (Amperes at 77°F25°C)

End Point										
Volts/Cell	5min	10min	15min	30min	1h	3h	5h	10h	20h	
1.60V	14.7	11.8	7.84	4.41	2.74	1.18	0.74	0.41	0.21	
1.65V	13.9	11.2	7.50	4.23	2.65	1.15	0.73	0.40	0.21	
1.70V	13.1	10.6	7.14	4.05	2.54	1.11	0.71	0.39	0.20	
1.75V	12.3	10.0	6.76	3.85	2.43	1.06	0.69	0.38	0.20	
1.80V	11.5	9.42	6.39	3.65	2.31	1.02	0.66	0.37	0.20	

### Discharge Constant Power (Watts at 77°F25°C)

End Point									
Volts/Cell	5min	10min	15min	30min	45min	1h	2h	3h	5h
1.60V	28.3	18.7	14.9	8.67	6.72	5.41	3.35	2.35	1.47
1.65V	26.6	17.6	14.1	8.23	6.41	5.19	3.25	2.30	1.44
1.70V	24.8	16.5	13.3	7.79	6.09	4.95	3.14	2.23	1.41
1.75V	23.1	15.4	12.5	7.34	5.76	4.70	3.01	2.17	1.38
1.80V	21.4	14.3	11.7	6.88	5.43	4.45	2.88	2.09	1.35

(Note)The above characteristics data are average values obtained within three charge/discharge cycles not the minimum values.All data shall be changed without notice, Vision reserves the right to explain and update the information contained hereinto.



**VISION GROUP**  
Shenzhen Center Power  
Tech.Co.Ltd.,

# CP640E 6V 4Ah(20hr)

